

Ref. 201

**304 Stainless steel
With Cylinder
Lock function**




HIGH QUALITY PANIC



Push type RIM PANIC bar device

Installation Diagram

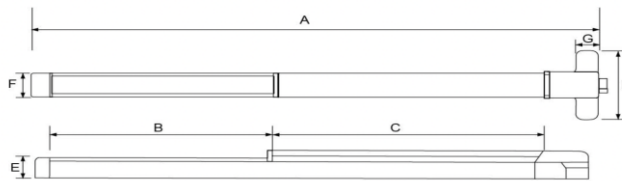

Sizes:

80 CM
100 CM



A	B	C	D	E	F	G
650	235	300	155	50	50	42
800	285	400	155	50	50	42
1050	425	500	155	50	50	42

②

IRONA
s p a i n

outside door

Install the cylinder collar with screws
make the lock-tongue extend to 7mm of door surface

④

the front and back cover fix on the door with screws

⑥

please operate according to the drawing
lest the lock function not well

①

outboard installation of trumpet head,
open a hole according to the configured size M5(2)

door outside

door inside surface

A

③

put the switched plate into the hole

fix the lock one door with screws
take the front and back cover off before install it

⑤

the situation of single door

installation of single door sealing plate

Backset measure from edge of 55.3

seal plate

IRONA - SPAIN - TEL: + 34639382238 - IRONA@IRONA.ES

Panic Exit Device Installation Instruction

